

SOBIL HLP Series Oils

DESCRIPTION:

SOBIL HLP Series Oils are high performance Hydraulic Oils for modern Hydraulic High Pressure Pumps and Hydraulic systems. SOBIL HLP Oils are blended from highly refined hydro treated high viscosity index base oils fortified with latest additive technology to provide complete protection on wear, corrosion, rust, oxidation and foaming.

APPLICATION:

SOBIL HLP Series Hydraulic Oils can be used in to meet or exceed the performance requirements of all hydraulic equipment manufacturers and Industry Organization Specifications. These oils are recommended for sophisticated high performance hydraulic systems where high temperature and pressure are encountered. SOBIL HLP Series available in ISO 32, 46, 68, 100 & 150 Viscosity Grades.

SPECIFICATIONS:

SOBIL HLP Series Hydraulic Oils meet the following performance specification requirements:

- DIN 51524 Part II & Part I
- Parker (Formerly Denison) HF-0, HF-1, HF-2 (HM/HL)
- SAE MS 1004 Type H Hydraulic Oil Specifications (HM Anti-wear)
- AGMA 9005-E20 Anti-wear
- Eaton Vickers M-2950-S & I-286-S3
- Meets Bosch Rexroth RD/E 90235
- Iso 11158 (HM & HL)
- Cincinnati MAG P-68 (VG 32), P-69 (VG 68) & P-70 (VG 46)
- JCMAS P041 HK Hydraulic Fluid Specification (Single Grade)
- Racine
- IS 10522:1983 (Reaffirmed 2004)


ADVANTAGES:

SOBIL HLP Series Hydraulic Oils offer the following advantages:

- ◆ Excellent Oxidation & Thermal Stability
- ◆ Improved filterability and consequently less downtime.
- ◆ Complete protection of critical components
- ◆ Outstanding wear protection for maximum equipment life.
- ◆ Very good energy saving potential and extended oil drain interval and filter life.
- ◆ Excellent hydrolytic stability for improved protection and extended life of yellow metal parts of the equipment
- ◆ Good sludge & particulate control.
- ◆ Long Oil and filter life ensuring unsurpassed equipment protection.

Guru Ram Lubricants

Kh. No. 853,874,0, Village-Dulna, Abhanpur Raipur,
Chattisgarh, India. 493885
Email : gururamlubricants1042018@gmail.com
Website : www.patanjalilubricants.com
Mobile Number : 9302700423, 9826186101

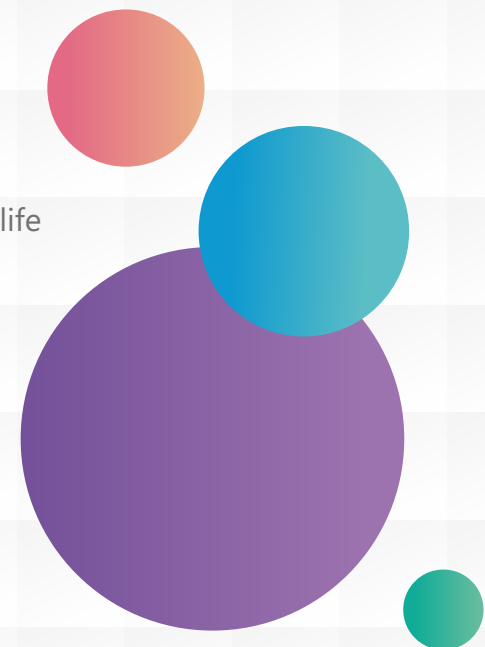

PROPERTIES	ASTM TEST METHOD	TYPICAL VALUES				
		HLP 32	HLP 46	HLP 68	HLP 100	HLP 150
Appearance	Visual	Clear & Bright				
Colour ASTM	D1500	L0.5	L0.5	L0.5	L0.5	L1.5
Density @ 29.5 C, gm.cm ³	D4052	0.8550	0.8575	0.8612	0.8540	0.8720
Kon. Viscosity @ 40 C, cSt	D445	31.80	45.80	68.80	96.10	152.3
Viscosity Index	D2270	>102	>102	>100	>100	>98
Flash Point, Coc, C	D92	>210	>220	>220	>230	>240
Pour Point, C	D97	-18	-15	-15	-15	-9
Rust Test	D665	Pass	Pass	Pass	Pass	Pass
Demulsibility Test	D1401	Pass	Pass	Pass	Pass	Pass
Copper Strip Corrosion Test	D130	Pass	Pass	Pass	Pass	Pass

The above details are typical results of normal production and variations in these characteristics may occur. The information contained herein is subject to change without notification. All recommendations and suggestions are without guarantee and the manufacturers do not accept liability for any loss or damage, however arising, which results directly from the use of such information, nor do we offer any warranty.

STORAGE

Store the products indoors and avoid direct sunlight or heat. Please keep the container in closed condition always.

ENVORNMENT, HEALTH AND SAFTEY

- ◆ Do not dispose the used oil to soil, drains and water. Dispose the used oil through authorized collection point
- ◆ This product is unlikely to present any safety & health hazard when properly used in the recommended application.
- ◆ Avoid contact with skin and eyes. After skin contact, wash with water and soap.

Rev.No.00 dtd 25thOct.2021

Guru Ram Lubricants

Kh. No. 853,874,0, Village-Dulna, Abhanpur Raipur,
Chattisgarh, India. 493885

Email : gururamlubricants1042018@gmail.com

Website : www.patanjalilubricants.com

Mobile Number : 9302700423, 9826186101

