

## DESCRIPTION:

**SOBIL HYDRAULIC OIL VG SERIES** is high performance Hydraulic & Circulating Oil blended from highly refined base oils fortified with Anti-Wear, Anti-Rust, Anti-Oxidant additives to provide excellent protection against wear, rust & corrosion and oxidation.

## APPLICATION:

**SOBIL HYDRAULIC OIL VG SERIES** can be used in hydraulic systems operating under moderate to severe conditions. Recommended for use in hydraulic systems where high temperature, pressure and pump speed are encountered. Also suitable for Systems requiring Anti-Wear properties.

## SPECIFICATIONS:

**SOBIL HYDRAULIC OIL VG SERIES** meet the following performance specification requirements:

- DIN 51524 Part I
- ISO HM

## ADVANTAGES:

**SOBIL HYDRAULIC OIL VG SERIES** offer the following advantages:

- ◆ Excellent Oxidation stability controls the formation of sludge & varnish and improves the oil life.
- ◆ Carefully selected rust & corrosion inhibitor protects the components of hydraulic systems.
- ◆ Superior Anti-wear property provides longer pump and component life and reduces the cost.
- ◆ Outstanding water separation property helps in resisting the formation of emulsion and rust.
- ◆ Excellent Anti-Foam properties ensure superior response.
- ◆ Compatible with sealing materials commonly used in hydraulic systems.


## Guru Ram Lubricants

Kh. No. 853,874,0, Village-Dulna, Abhanpur Raipur,  
Chattisgarh, India. 493885

Email : gururamlubricants1042018@gmail.com

Website : [www.patanjalilubricants.com](http://www.patanjalilubricants.com)

Mobile Number : 9302700423, 9826186101

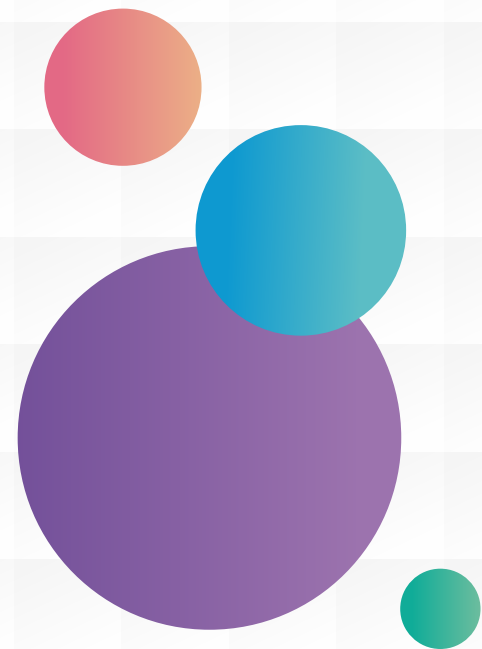

Appearance	Visual	Bright & Clear	
Colour ASTM	D 1500	L 1.5	L 2.0
Density @ 29.5 C, gm/cc	D 1298	0.8610	0.8602
Kinematic Viscosity @ 40 C, cSt	D 445	46.85	68.35
Kinematic Viscosity @ 100 C, cSt	D 455	6.870	8.764
Viscosity Index	D 2270	101	100
Flash Point, C	D 92	222	234
Pour Point, C	D 97	-9	-9
Rust Test	D 665	Pass	Pass
Copper Strip Corrosion Test	D 130	Pass	Pass

The above details are typical results of normal production and variations in these characteristics may occur. The information contained herein is subject to change without notification. All recommendations and suggestions are without guarantee and the manufacturers do not accept liability for any loss or damage, however arising, which results directly from the use of such information, nor do we offer any warranty.

#### **STORAGE:**

Store the products indoors and avoid direct sunlight or heat. Please keep the container in closed condition always.

#### **ENVIRONMENT, HEALTH AND SAFETY**

- " Do not dispose the used oil to soil, drains and water. Dispose the used oil through authorized collection point
- " This product is unlikely to present any safety & health hazard when properly used in the recommended application.
- " Avoid contact with skin and eyes. After skin contact, wash with water and soap.

**Rev.No.00 dtd 25th Oct 2021**

#### **Guru Ram Lubricants**

Kh. No. 853,874,0, Village-Dulna, Abhanpur Raipur,  
Chattisgarh, India. 493885  
Email : gururamlubricants1042018@gmail.com  
Website : www.patanjalilubricants.com  
Mobile Number : 9302700423, 9826186101

