

SOBIL QUEN MP 8

DESCRIPTION:

SOBIL QUEN MP 8 is specially formulated Mar-tempering Oil blended from selective hydro treated base oils fortified with modern and effective anti-oxidation, wetting and anti-foam additives. It helps to produce hardened parts with minimum distortion.

APPLICATION:

SOBIL QUEN MP 8 is suitable for uniform hardening of component/parts which are prone to distortion. It is suitable for components viz., ferrous and non-ferrous metals in Gears, Bearings & other automotive components.

Note: The suitable operating temperatures:

For open Quenching = 100 C max Under controlled atmosphere = 120 C max.

ADVANTAGES:

SOBIL QUEN MP 8 offers the following advantages:

- > Extended Quench oil bath life due to
 - Marked Oxidation stability
 - Outstanding Thermal stability
 - Low sludge formation

EXTENDED COOLING & LESS CARRYOVER LOSSES DUE TO

- Low Viscosity
- > Exceptional bright finish.


Guru Ram Lubricants

Kh. No. 853,874,0, Village-Dulna, Abhanpur Raipur,

Chattisgarh, India. 493885

Email: gururamlubricants1042018@gmail.com

Website: www.patanjalilubricants.com Mobile Number: 9302700423, 9826186101

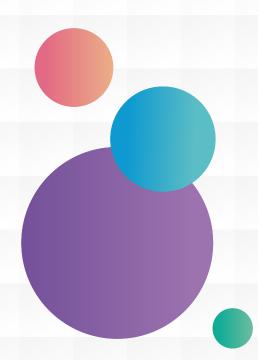



SOBIL QUEN MP 8

PROPERTIES	ASTM TEST METHOD	TYPICAL VALUES
Appearance	Visual	Bright & Clear
Colour ASTM	D 1500	3.0 (MAX)
Specific Gravity @ 29.5 C	D 1298	0.8740
Kinematic Viscosity @ 40 C, cSt	D 445	70.00
Kinematic Viscoity @ 100 C, cSt	D 445	8.9
Total Acid Number, Mg KOH / gm of Oil	D 664	0.9
Flash Point, COC, C	D 92	240
Pour Point, C	D 97	-6
Moisture / Water content, Ppm	D 1744KF	40

The above details are typical results of normal production and variations in these characteristics may occur. The information contained herein is subject to change without notification. All recommendations and suggestions are without guarantee and the manufacturers do not accept liability for any loss or damage, however arising, which results directly from the use of such information, nor do we offer any warranty.

STORAGE:

Store the products indoors and avoid direct sunlight or heat. Please keep the container in closed condition always.

ENVOIRNMENT, HEALTH & SAFTEY:

- Do not dispose the used oil to soil, drains and water. Dispose the used oil through authorized collection point
- This product is unlikely to present any safety & health hazard when properly used in the recommended application.
- Avoid contact with skin and eyes. After skin contact, wash with water and soap.

Rev.No.00 dtd 25th Oct. 2021

Guru Ram Lubricants

Kh. No. 853,874,0, Village-Dulna, Abhanpur Raipur,

Chattisgarh, India. 493885

Email: gururamlubricants1042018@gmail.com

Website: www.patanjalilubricants.com Mobile Number: 9302700423, 9826186101

