



## SOBIL SYNTH MÈREGEAR 75W-90

### DESCRIPTION:

**SOBIL SYNTH MÈREGEAR 75W-90** is a premium grade synthetic gear lubricant for heavy duty, extreme pressure (EP) applications which is formulated using synthetic base stocks with high viscosity index & low pour points. Its advance additive technology protects gears and bearings operated under a wide variety of load conditions.

### APPLICATIONS:

SOBIL SYNTH MÈREGEAR 75W-90 is recommended for Manual Transmission where EP type of lubricants are required, also recommended for limited slip differentials and transfer cases.

### SPECIFICATIONS:

**SOBIL SYNTH MÈREGEAR 75W-90** meets or exceeds performance specification requirements of:

- API Service GL-4

### ADVANTAGES:

SOBIL SYNTH MÈREGEAR 75W-90 offers the following advantages:

- ◆ "All-season" lubrication and extended drain intervals.
- ◆ Extremely high film strength.
- ◆ Superior low temperature performance.
- ◆ Reduces sludge and varnish formations.


### Guru Ram Lubricants

Kh. No. 853,874,0, Village-Dulna, Abhanpur Raipur,  
Chattisgarh, India. 493885

Email : gururamlubricants1042018@gmail.com

Website : [www.patanjalilubricants.com](http://www.patanjalilubricants.com)

Mobile Number : 9302700423, 9826186101

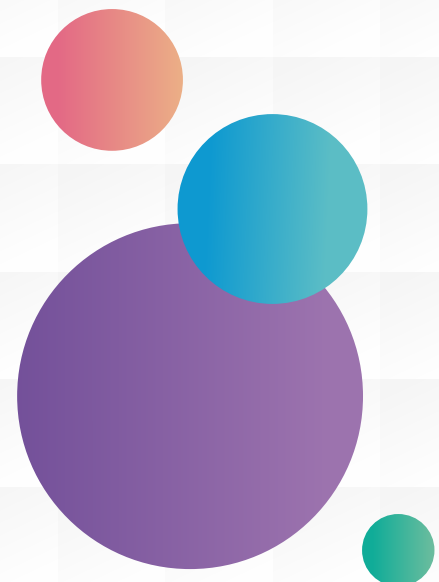

PROPERTIES	ASTM TEST METHOD	TYPICAL VALUES
Appearance	Visual	Bright & Clear
Colour ASTM	ASTM D1500	L 0.5
Density @ 29.5 C, gm/cc	ASTM D4052	0.8300
Kinematic Viscosity @ 40 C, cSt	ASTM D445	15.20
Kinematic Viscosity @ 100 C, cSt	ASTM D455	3.81
Viscosity Index	ASTM D2270	148
Flash Point, C	ASTM D92	190
Pour Point, C	ASTM D97	-33

The above details are typical results of normal production and variations in these characteristics may occur. The information contained herein is subject to change without notification. All recommendations and suggestions are without guarantee and the manufacturers do not accept liability for any loss or damage, however arising, which results directly from the use of such information, nor do we offer any warranty.

### STORAGE

Store the products indoors and avoid direct sunlight or heat. Please keep the container in closed condition always.

### ENVIRONMENT, HEALTH AND SAFETY

- ◆ Do not dispose the used oil to soil, drains and water. Dispose the used oil through authorized collection point
- ◆ This product is unlikely to present any safety & health hazard when properly used in the recommended application.
- ◆ Avoid contact with skin and eyes. After skin contact, wash with water and soap.

Rev.No.00 dtd 25th Oct.2021

#### Guru Ram Lubricants

Kh. No. 853,874,0, Village-Dulna, Abhanpur Raipur,  
Chattisgarh, India. 493885  
Email : gururamlubricants1042018@gmail.com  
Website : www.patanjalilubricants.com  
Mobile Number : 9302700423, 9826186101

