

DESCRIPTION:

SOBIL MÈRE TRACK 15W-40 is a high quality premium multigrade engine oil ideally suited for engines operating continuously under extreme conditions. It is suitable for Turbo charged & Direct Injection engines where the engines observe high stress conditions.

APPLICATION:

SOBIL MÈRE TRACK 15W-40 Engine Oil recommended for high performance turbo charged engines of modern cars operating under rough conditions.

SPECIFICATIONS:

SOBIL MÈRE TRACK 15W-40 exceeds the specification requirements of:

- API CH-4/SJ MB 228.3
- MTU Type 2
- VDS-3
- Cummins CES 20077
- MAN 3275

ADVANTAGES:

SOBIL MÈRE TRACK 15W-40 Offer the following advantages:

- Superior engine protection on critical parts.
- Exceptional cleansing even at longer drain interval periods.
- Remove the sludge faster than the conventional oils.
- Improves engine efficiency and reduce the deposits.
- Neutralizes the corrosive combustion acids efficiently and protects the engine parts.
- Provides complete engine protection across different engine speeds & conditions.
- Extended Drain interval


Guru Ram Lubricants

Kh. No. 853,874,0, Village-Dulna, Abhanpur Raipur,
Chattisgarh, India. 493885

Email : gururamlubricants1042018@gmail.com

Website : www.patanjalilubricants.com

Mobile Number : 9302700423, 9826186101

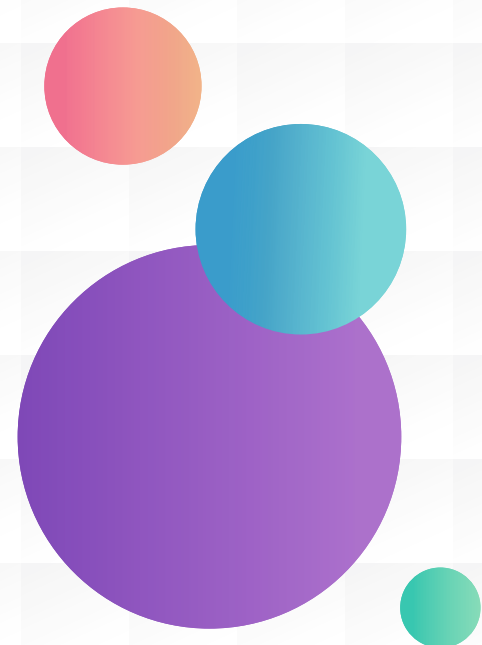

PROPERTIES	ASTM TEST METHOD	TYPICAL VALUES
Appearance	Visual	Bright & Clear
Colour ASTM	D1500	L 3.5
Density @29.5°C, gm/cc	D4052	0.8600
Kin. Viscosity @ 40°C, cSt	D445	110.8
Kin. Viscosity @ 100°C, cSt	D445	14.50
Viscosity Index	D2270	134
Flash Point, °C	D92	220
Pour Point, °C	D97	-33
Total Base Number, mg KOH/gm	D2896	8.50
CCS Viscosity @ -20°C, cP	D5293	6400

The above details are typical results of normal production and variations in these characteristics may occur. The information contained herein is subject to change without notification. All recommendations and suggestions are without guarantee and the manufacturers do not accept liability for any loss or damage, however arising, which results directly from the use of such information, nor do we offer any warranty.

STORAGE:

Store the products indoors and avoid direct sunlight or heat. Please keep the container in closed condition always.

ENVORNMENT, HEALTH AND SAFTEY:

- ◆ Do not dispose the used oil to soil, drains and water. Dispose the used oil through authorized collection point.
- ◆ This product is unlikely to present any safety & health hazard when properly used in the recommended application.
- ◆ Avoid contact with skin and eyes. After skin contact, wash with water and soap.

Rev.No.00 dtd 26th Mar. 2022

Guru Ram Lubricants

Kh. No. 853,874,0, Village-Dulna, Abhanpur Raipur,
Chattisgarh, India. 493885
Email : gururamlubricants1042018@gmail.com
Website : www.patanjalilubricants.com
Mobile Number : 9302700423, 9826186101

