

DESCRIPTION:

SOBIL MÈRE TRACK 5W-30 is the most technically advanced top-tier car engine oil designed for the naturally aspirated, turbo-charged and super-charged engines. Its highly effective & robust synthetic formula reduces the friction and maximizes the engine performance and provides excellent oxidation stability, low temperature flow properties and enhanced fuel economy.

APPLICATION:

SOBIL MÈRE TRACK 5W-30 Engine oil recommended latest new generation cars manufactured by all leading OEMs of Honda, Suzuki, GM, Ford, Toyota, Nissan, Renault, Hyundai etc.

SPECIFICATIONS:

SOBIL MÈRETRACK 5W-30 meets & exceeds the requirements of the performance specifications:

- API SL/CF

ADVANTAGES:

SOBIL MÈRE TRACK 5W-30 Offer the following advantages:

- Longer engine life.
- Easy cold start-up of engine
- Excellent fuel economy benefits.
- Improves engine efficiency and reduce the deposits.
- Controls the formation of sludge & varnish and improves the oil life.
- Provides complete engine protection across different engine speeds, conditions and temperatures


Guru Ram Lubricants

Kh. No. 853,874,0, Village-Dulna, Abhanpur Raipur,
Chattisgarh, India. 493885

Email : gururamlubricants1042018@gmail.com

Website : www.patanjalilubricants.com

Mobile Number : 9302700423, 9826186101

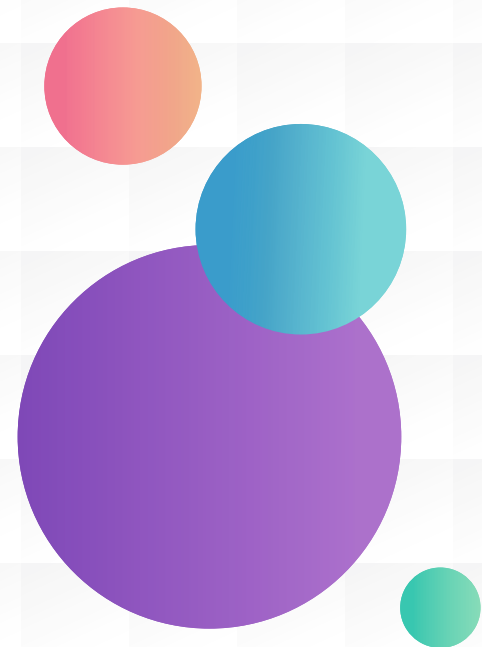

| PROPERTIES | ASTM TEST METHOD | TYPICAL VALUES |
|------------------------------|------------------|----------------|
| Appearance | Visual | Bright & Clear |
| Colour ASTM | D1500 | L 2.5 |
| Density @29.5°C, gm/cc | D4052 | 0.8530 |
| Kin. Viscosity @ 40°C, cSt | D445 | 62.50 |
| Kin. Viscosity @ 100°C, cSt | D445 | 10.48 |
| Viscosity Index | D2270 | 157 |
| Flash Point, °C | D92 | 226 |
| Pour Point, °C | D97 | -39 |
| Total Base Number, mg KOH/gm | D2896 | 5.56 |
| CCS Viscosity @ -30°C, cP | D5293 | 5878 |

The above details are typical results of normal production and variations in these characteristics may occur. The information contained herein is subject to change without notification. All recommendations and suggestions are without guarantee and the manufacturers do not accept liability for any loss or damage, however arising, which results directly from the use of such information, nor do we offer any warranty.

STORAGE:

Store the products indoors and avoid direct sunlight or heat. Please keep the container in closed condition always.

ENVORNMENT, HEALTH AND SAFTEY:

- ◆ Do not dispose the used oil to soil, drains and water. Dispose the used oil through authorized collection point.
- ◆ This product is unlikely to present any safety & health hazard when properly used in the recommended application.
- ◆ Avoid contact with skin and eyes. After skin contact, wash with water and soap.

Rev.No.00 dtd 26th Mar. 2022

Guru Ram Lubricants

Kh. No. 853,874,0, Village-Dulna, Abhanpur Raipur,
Chattisgarh, India. 493885
Email : gururamlubricants1042018@gmail.com
Website : www.patanjalilubricants.com
Mobile Number : 9302700423, 9826186101

