

## DESCRIPTION:

**SOBIL SYNTH MÈRE TRACK 5W-30** is premium quality fully synthetic car engine oil designed for new generation car's fitted with naturally aspirated, turbo-charged and super-charged engines. Its advanced synthetic formula reduces the friction, maximizes the engine performance and provides excellent thermal stability, low temperature oil flow and enhanced fuel economy.

## APPLICATION:

**SOBIL SYNTH MÈRE TRACK 5W-30** Engine oil recommended latest new generation cars manufactured by all leading OEMs of Honda, Suzuki, GM, Ford, Toyota, Nissan, Renault, Hyundai etc.

## SPECIFICATIONS:

**SOBIL SYNTH MÈRE TRACK 5W-30** exceeds the requirements of the following performance specifications:

- API SN/CF
- ACEA A3/B3 & A3/B4
- RENAULT RN0710/0700
- ACEA A5/B5
- MB 229.3/229.5
- VW 502.00/505.00

## ADVANTAGES:

**SOBIL SYNTH MÈRE TRACK 5W-30** Offer the following advantages:

- Longer engine life.
- Easy cold start-up of engine
- Excellent fuel economy benefits.
- Improves engine efficiency and reduce the deposits.
- Controls the formation of sludge & varnish and improves the oil life.
- Provides complete engine protection across different engine speeds, conditions and temperatures.


## Guru Ram Lubricants

Kh. No. 853,874,0, Village-Dulna, Abhanpur Raipur,  
Chattisgarh, India. 493885

Email : gururamlubricants1042018@gmail.com

Website : [www.patanjalilubricants.com](http://www.patanjalilubricants.com)

Mobile Number : 9302700423, 9826186101

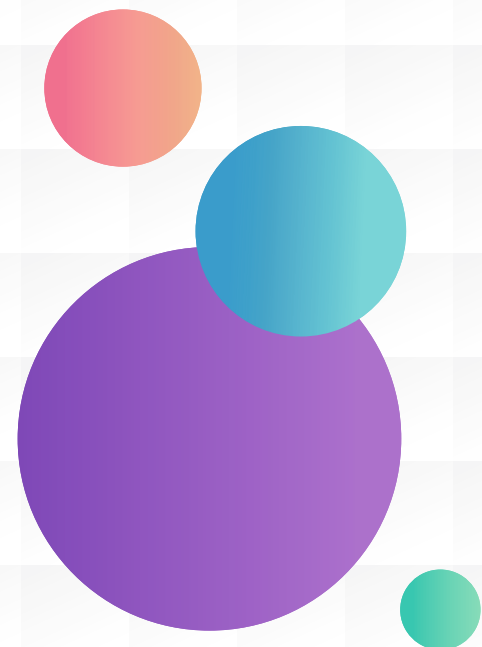

PROPERTIES	ASTM TEST METHOD	TYPICAL VALUES
Appearance	Visual	Bright & Clear
Colour ASTM	D1500	L 3.0
Density @29.5°C, gm/cc	D4052	0.8430
Kin. Viscosity @40°C, cSt	D445	58.95
Kin. Viscosity @100°C, cSt	D445	10.30
Viscosity Index	D2270	165
Flash Point, °C	D92	240
Pour Point, °C	D97	-33
Total Base Number, mg KOH/gm	D2896	10.00
CCS Viscosity @ -30°C, cP	D5293	5793

The above details are typical results of normal production and variations in these characteristics may occur. The information contained herein is subject to change without notification. All recommendations and suggestions are without guarantee and the manufacturers do not accept liability for any loss or damage, however arising, which results directly from the use of such information, nor do we offer any warranty.

**STORAGE:**

Store the products indoors and avoid direct sunlight or heat. Please keep the container in closed condition always.

**ENVORNMENT, HEALTH AND SAFTEY:**

- ◆ Do not dispose the used oil to soil, drains and water. Dispose the used oil through authorized collection point.
- ◆ This product is unlikely to present any safety & health hazard when properly used in the recommended application.
- ◆ Avoid contact with skin and eyes. After skin contact, wash with water and soap.

**Rev.No.00 dtd 26th Mar. 2022**

**Guru Ram Lubricants**

Kh. No. 853,874,0, Village-Dulna, Abhanpur Raipur,  
Chattisgarh, India. 493885  
Email : gururamlubricants1042018@gmail.com  
Website : www.patanjalilubricants.com  
Mobile Number : 9302700423, 9826186101

