

DESCRIPTION:

SOBIL AMI HD 15W-40 is a high quality premium multigrade engine oil ideally suited for engines operating continuously under extreme conditions. It is suitable for Turbo charged & Direct Injection engines where the engines observe high stress conditions

APPLICATION:

SOBIL AMI HD 15W-40 Engine Oil recommended for high performance engines of Turbo charged & Naturally charged with EGR (Exhaust Gas Re-circulator), Diesel Generating Sets, Engines operating under heavy load for construction machinery and farm equipment's

SPECIFICATIONS:

SOBIL AMI HD 15W-40 exceeds the specification requirements of:

- API CH-4 / CG-4 / SL / SJ

ADVANTAGES:

SOBIL SYNTH MÈRE TRACK 5W-40 Offer the following advantages:

- Superior engine protection on critical engine parts.
- Exceptional cleansing even at longer drain interval periods.
- Helps to remove the sludge faster than the conventional oils.
- Improves engine efficiency and reduce the deposits.
- Neutralizes the corrosive combustion acids efficiently and protects the engine parts. Its highly effective & robust synthetic formula reduces the friction and maximizes the engine performance.
- Extended Drain interval
- Provides complete engine protection across different engine speeds & conditions


Guru Ram Lubricants

Kh. No. 853,874,0, Village-Dulna, Abhanpur Raipur,
Chattisgarh, India. 493885

Email : gururamlubricants1042018@gmail.com

Website : www.patanjalilubricants.com

Mobile Number : 9302700423, 9826186101

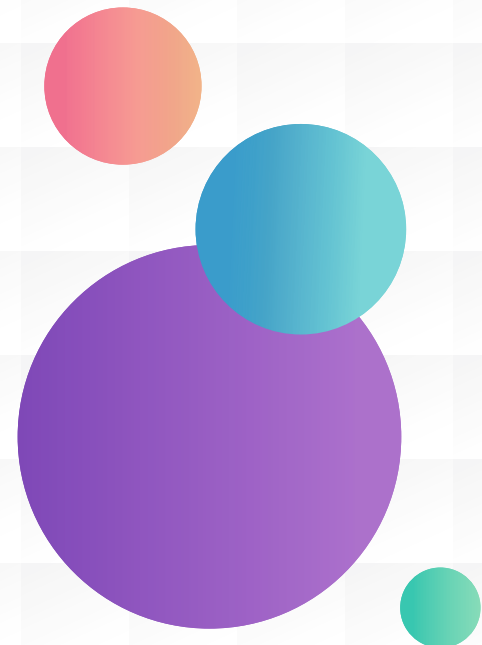

PROPERTIES	ASTM TEST METHOD	TYPICAL VALUES
Appearance	Visual	Bright & Clear
Colour ASTM	D1500	L 3.5
Density @29.5°C, gm/cc	D4052	0.8675
Kin. Viscosity @ 40°C, cSt	D445	107.5
Kin. Viscosity @ 100°C, cSt	D445	14.25
Viscosity Index	D2270	135
Flash Point, °C	D92	230
Pour Point, °C	D97	-33
Total Base Number, mg KOH/gm	D2896	11.10
CCS Viscosity @ -20°C, cP	D5293	5968

The above details are typical results of normal production and variations in these characteristics may occur. The information contained herein is subject to change without notification. All recommendations and suggestions are without guarantee and the manufacturers do not accept liability for any loss or damage, however arising, which results directly from the use of such information, nor do we offer any warranty.

STORAGE:

Store the products indoors and avoid direct sunlight or heat. Please keep the container in closed condition always.

ENVORNMENT, HEALTH AND SAFTEY:

- ◆ Do not dispose the used oil to soil, drains and water. Dispose the used oil through authorized collection point.
- ◆ This product is unlikely to present any safety & health hazard when properly used in the recommended application.
- ◆ Avoid contact with skin and eyes. After skin contact, wash with water and soap.

Rev.No.00 dtd 26th Mar. 2022

Guru Ram Lubricants

Kh. No. 853,874,0, Village-Dulna, Abhanpur Raipur,
Chattisgarh, India. 493885
Email : gururamlubricants1042018@gmail.com
Website : www.patanjalilubricants.com
Mobile Number : 9302700423, 9826186101

