

# **SOBIL BRIGHT QUEN 32**

#### **DESCRIPTION:**

**SOBIL BRIGHT QUEN 32** is a quenching oil specially developed for Bearing, Small fuel injection pump, bolt, nail, sheet spring needed plating. Drive shaft and differential pinion gear for automobile.

#### **APPLICATION:**

**SOBIL BRIGHT QUEN 32** is specially developed for quenching in atmosphere furnace, press quenching, vacuum oil quenching, "Ni-Temp" or "Trinding".

Note: The oil can be used for oil bath temperature between 100°C and 180°C.

#### **ADVANTAGES:**

**SOBIL BRIGHT QUEN 32** Offers the following benefits:

- Assures bright finish maintaining for a long time.
- · Special agents inhibit sludge formation and oxidation to extend service life
- Reduce vapor blanket in the initial cooling stage.
- Maintains suitable cooling curves.


#### **Guru Ram Lubricants**

Kh. No. 853,874,0, Village-Dulna, Abhanpur Raipur,

Chattisgarh, India. 493885

Email: gururamlubricants1042018@gmail.com

Website: www.patanjalilubricants.com Mobile Number: 9302700423, 9826186101

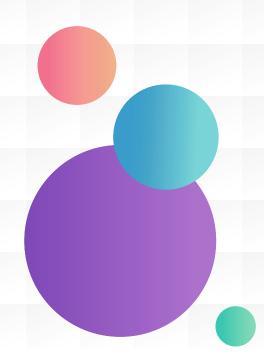



# **SOBIL BRIGHT QUEN 32**

PROPERTIES	ASTM TEST METHOD	SPECIFICATION
Appearance	Visual	Bright clear Fluid
Colour ASTM	D1500	4.0 Max
Density @15°c, gm/cm³	D1298	0.8860
Kinematic Viscosity @ 100 °C, cSt	D445	30.00 to 40.00
Viscosity Index	D2270	100 Min
Total Base Number, mg KOH / gm	D664	0.5 Max
Flash Point, COC, °C	D92	200 Min
Moisture/Water Content, ppm	D1744KF	100
Cu. Currosion @100°C for 3hrs	D130	1 Max

The above details are typical results of normal production and variations in these characteristics may occur. The information contained herein is subject to change without notification. All recommendations and suggestions are without guarantee and the manufacturers do not accept liability for any loss or damage, however arising, which results directly from the use of such information, nor do we offer any warranty.

# STORAGE:

Store the products indoors and avoid direct sunlight or heat. Please keep the container in closed condition always.

# **ENVORNMENT, HEALTH AND SAFTEY:**

- Do not dispose the used oil to soil, drains and water. Dispose the used oil through authorized collection point.
- This product is unlikely to present any safety & health hazard when properly used in the recommended application.
- Avoid contact with skin and eyes. After skin contact, wash with water and soap.

Rev. No. 00 dtd 26th Mar. 2022

### **Guru Ram Lubricants**

Kh. No. 853,874,0, Village-Dulna, Abhanpur Raipur,

Chattisgarh, India. 493885

Email: gururamlubricants1042018@gmail.com

Website: www.patanjalilubricants.com Mobile Number: 9302700423, 9826186101

