

SOBIL SUPER TURBO 15W-40

DESCRIPTION:

SOBIL SUPER TURBO 15W-40 is the most technically advanced top-tier car engine oil designed for the naturally aspirated, turbo-charged and super-charged engines. Its highly effective & robust synthetic formula reduces the friction and maximizes the engine performance and provides excellent oxidation stability, low temperature flow properties and enhanced fuel economy.

APPLICATION:

SOBIL SUPER TURBO 15W-40 Engine Oil recommended for high performance engines of Turbo charged & Naturally aspirated, Diesel Gen-Sets, Engines operating under heavy load for construction machinery, farm equipment's and tractors.

SPECIFICATIONS:

SOBIL SUPER TURBO 15W-40 meets the specification requirements of:

- API CF-4/ CE/SG

ADVANTAGES:

SOBIL SUPER TURBO 15W-40 Offer the following advantages:

- Excellent Anti-wear, anti-oxidant and detergency properties.
- Superior engine protection on critical engine parts.
- Minimizes sludge formation.
- Improves engine efficiency and reduce the deposits.
- Higher soot dispersancy characteristics.
- Extended Drain interval
- Provides complete engine protection across different engine speeds & conditions.


Guru Ram Lubricants

Kh. No. 853,874,0, Village-Dulna, Abhanpur Raipur,
Chattisgarh, India. 493885

Email : gururamlubricants1042018@gmail.com

Website : www.patanjalilubricants.com

Mobile Number : 9302700423, 9826186101

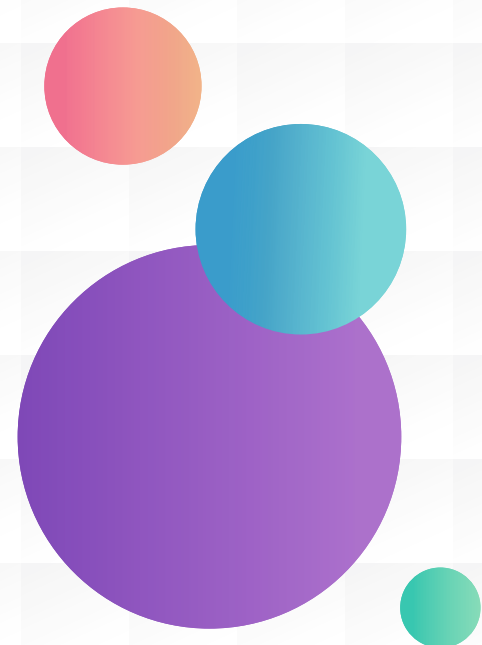

PROPERTIES	ASTM TEST METHOD	TYPICAL VALUES
Appearance	Visual	Bright & Clear
Colour ASTM	D1500	L 3.5
Density @29.5°C, gm/cc	D4052	0.8721
Kin. Viscosity @ 40°C, cSt	D445	108.7
Kin. Viscosity @ 100°C, cSt	D445	14.29
Viscosity Index	D2270	134
Flash Point, °C	D92	238
Pour Point, °C	D97	-27
Total Base Number, mg KOH/gm	D2896	6.35
CCS Viscosity @ -20°C, cP	D5293	6160

The above details are typical results of normal production and variations in these characteristics may occur. The information contained herein is subject to change without notification. All recommendations and suggestions are without guarantee and the manufacturers do not accept liability for any loss or damage, however arising, which results directly from the use of such information, nor do we offer any warranty.

STORAGE:

Store the products indoors and avoid direct sunlight or heat. Please keep the container in closed condition always.

ENVORNMENT, HEALTH AND SAFTEY:

- ◆ Do not dispose the used oil to soil, drains and water. Dispose the used oil through authorized collection point.
- ◆ This product is unlikely to present any safety & health hazard when properly used in the recommended application.
- ◆ Avoid contact with skin and eyes. After skin contact, wash with water and soap.

Rev.No.00 dtd 26th Mar. 2022

Guru Ram Lubricants

Kh. No. 853,874,0, Village-Dulna, Abhanpur Raipur,
Chattisgarh, India. 493885
Email : gururamlubricants1042018@gmail.com
Website : www.patanjalilubricants.com
Mobile Number : 9302700423, 9826186101

