# SOBIL AMI SYNTH 4T 10W-40

#### **DESCRIPTION:**

**Sobil** 

LUBRICANTS

**SOBIL AMI SYNTH 4T 10W-40** is premium quality fully synthetic engine oil powered with "ENGINE BOOST TECHNOLOGY" (EBT) and blended with Ultrapure Molecules delivering Cleaner, Cooler and Smoother Ride.

#### **APPLICATION:**

**SOBIL AMI SYNTH 4T 10W-40** is recommended for new generation 4-stroke motorcycles of all leading OEM's recommending 10W-40 grade engine oil.

#### **SPECIFICATIONS:**

SOBIL AMI SYNTH 4T 10W-40 meets the specification requirements of:

- API SN
- JASO MA2


### **ADVANTAGES:**

SOBIL AMI SYNTH 4T 10W-40 offers the following advantages:

- Excellent engine power boost.
- Lower oil consumption.
- Smooth clutch operation.
- Excellent Gear Protection
- Unmatched engine cleanliness.
- Very good low temperature properties.
- Outstanding wear protection.
- Superior thermal and oxidation stability.

#### **Guru Ram Lubricants**

Kh. No. 853,874,0, Village-Dulna, Abhanpur Raipur, Chattisgarh, India. 493885 Email : gururamlubricants1042018@gmail.com Website : www.patanjalilubricants.com Mobile Number : 9302700423, 9826186101

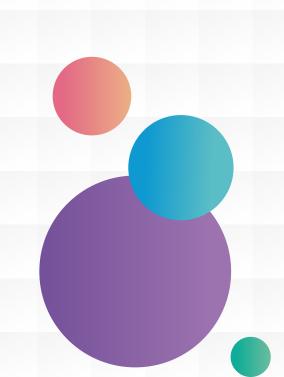

# 

SOBIL AMI SYNTH 4T 10W-40

PROPERTIES	ASTM Test Method	TYPICAL VALUES
Appearance	Visual	Bright & Clear
Colour ASTM	ASTM D1500	L 3.0
Density @ 29.5 C, gm/cc	ASTM D4052	0.8400
Kinematic Viscosity @ 40 C, cSt	ASTM D445	93.06
Kinematic Viscoity @ 100 C, cSt	ASTM D445	14.60
Viscosity Index	ASTM D2270	163
Flash Point, C	ASTM D92	244
Pour Point, C	ASTM D97	-34
Total Base Number, mg KOH/gm	ASTM 2896	2896 6.50
CCS Viscosity @ -15 C, cP	ASTM D5293	5155

The above details are typical results of normal production and variations in these characteristics may occur. The information contained herein is subject to change without notification. All recommendations and suggestions are without guarantee and the manufacturers do not accept liability for any loss or damage, however arising, which results directly from the use of such information, nor do we offer any warranty.

# **STORAGE:**

Store the products indoors and avoid direct sunlight or heat. Please keep the container in closed condition always.

# **ENVIRONMENT, HEALTH AND SAFETY**

- Do not dispose the used oil to soil, drains and water. Dispose the used oil through authorized collection point
- This product is unlikely to present any safety & health hazard when properly used in the recommended application.
- Avoid contact with skin and eyes. After skin contact, wash with water and soap.

Rev.No.00 dtd 26th Mar 2022

# **Guru Ram Lubricants**

Kh. No. 853,874,0, Village-Dulna, Abhanpur Raipur, Chattisgarh, India. 493885 Email : gururamlubricants1042018@gmail.com Website : www.patanjalilubricants.com Mobile Number : 9302700423, 9826186101

