

DESCRIPTION

SOBIL MÈREGEAR EP 90 is a high performance gear oil designed to provide effective lubrication in wide range of automotive and transmissions and axle drives where GL-4 performance is required. The advance formula with hi quality extreme pressure additive technology provides all-rounder protection of gears, its components against wear and scoring.

APPLICATION

SOBIL MÈREGEAR EP 90 is recommended for transaxles requiring GL-4 performance, cars, mini trucks, construction, mining and agriculture equipment's. It can be used in applications where spiral bevel gears operating under moderate to severe speeds and loads and axles with hypoid gears.

SPECIFICATIONS & APPROVALS

SOBIL MÈREGEAR EP 90 meet the following performance specification

- API GL-4

ADVANTAGES

SOBIL MÈREGEAR EP 90 delivers following advantages:

- ◆ Excellent seal compatibility.
- ◆ Protection against rust and corrosion.
- ◆ Outstanding thermal and chemical stability.
- ◆ Excellent extreme pressure and anti-wear properties.


Guru Ram Lubricants

Kh. No. 853,874,0, Village-Dulna, Abhanpur Raipur,
Chattisgarh, India. 493885

Email : gururamlubricants1042018@gmail.com

Website : www.patanjalilubricants.com

Mobile Number : 9302700423, 9826186101

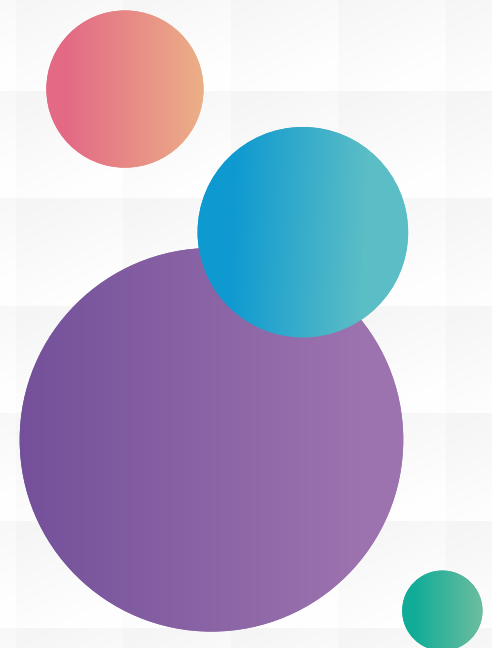



| PROPERTIES | ASTM TEST METHOD | TYPICAL VALUES |
|----------------------------------|------------------|----------------|
| Appearance | Visual | Bright & Clear |
| Colour ASTM | D1500 | L 3.0 |
| Density @ 29.5 C, gm/cc | D4052 | 0.8740 |
| Kinematic Viscosity @ 40 C, cSt | D445 | 163.0 |
| Kinematic Viscosity @ 100 C, cSt | D455 | 16.60 |
| Viscosity Index | D2270 | 107 |
| Flash Point, C | D92 | 210 |
| CCS Viscosity @ -25 C, cP | D97 | -33 |

The above details are typical results of normal production and variations in these characteristics may occur. The information contained herein is subject to change without notification. All recommendations and suggestions are without guarantee and the manufacturers do not accept liability for any loss or damage, however arising, which results directly from the use of such information, nor do we offer any warranty.

STORAGE

Store the products indoors and avoid direct sunlight or heat. Please keep the container in closed condition always.

ENVIRONMENT, HEALTH AND SAFETY

- ◆ Do not dispose the used oil to soil, drains and water. Dispose the used oil through authorized collection point
- ◆ This product is unlikely to present any safety & health hazard when properly used in the recommended application.
- ◆ Avoid contact with skin and eyes. After skin contact, wash with water and soap.

Rev.No.00 dtd 25th Oct.2021

Guru Ram Lubricants

Kh. No. 853,874,0, Village-Dulna, Abhanpur Raipur,
Chattisgarh, India. 493885
Email : gururamlubricants1042018@gmail.com
Website : www.patanjalilubricants.com
Mobile Number : 9302700423, 9826186101

